

# RTD Isolated Barrier

## NPEXA-C2D11

Double inputs, double outputs

Input: RTD

Output: 4 ~ 20 mA




Temperature input isolated barrier, it converts the thermal resistance signals from a hazardous area into 4~20mA signals to a safe area by isolation. It needs an independent power supply. The input, output, and power supply are galvanically isolated from each other. The self-test function is also available on this device. Calibrate the apparatus or modify parameters by using a handheld programmer.

### Parameters

Power supply:	18V DC ~ 60V DC (Reverse power protection)
Power dissipation:	1.2W
Input signal:	RTD
Line resistance:	20 Ω per line (RTD)
Output signal:	4 ~ 20mA (sink/source)
Load resistance:	source: $RL \leq 550$ Ω sink: $RL < [(U-3)/0.02]$ ; U: Loop power supply
Temperature drift:	30ppm/°C
Response time:	500ms
Electromagnetic compatibility:	IEC 61326-3-1
Dielectric strength:	3000V AC (intrinsically safe side / non-intrinsically safe side) 1500V AC (Power supply /non-intrinsically safe side)
Insulation resistance:	100M Ω (Input /Output/Power supply)
Operation temperature:	-20°C ~ +60°C
Storage temperature:	-40°C ~ +80°C
Dimension:	17.8mm (W) × 110mm (H) × 117mm (D)
Output states:	Default following mode, it can be configured as 4mA~20mA NE43 mode or fixed output mode.

### Wiring diagram

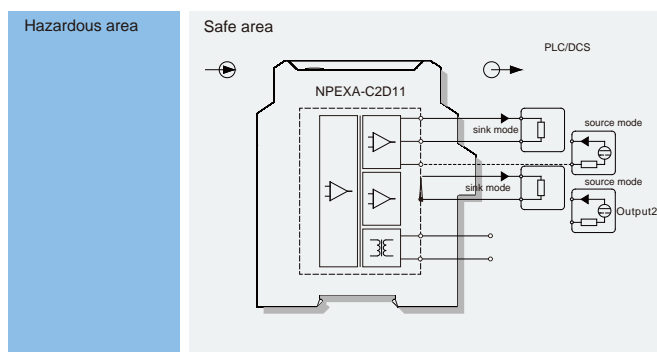

### Explosive-proof parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex marking: [Ex ia Ga] C  
[Ex ia Da] C

Um: 250V

Certified parameters (Terminals 1, 2, 3; 4, 5, 6):

Uo=8.7V, Io=33mA, Po=72mW

C: Co=5μF, Lo=28mH

C(B): Co=49μF, Lo=84mH

### Model rules

NPEXA-C2D

- ||| PB: BUS powered
- ||| Default: Terminals powered
- ||| The second output signal<sup>note</sup>
- ||| The first output signal<sup>note</sup>

note1: output signal

Number	Output signal
1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA