


Temperature input isolated barrier, it converts the thermocouple signals from a hazardous area into 4~20mA signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output, and power supply are galvanically isolated from each other. The self-test function is also available on this device. Calibrate the apparatus or modify parameters by using a handheld programmer.

Parameters

Power supply:	18V DC ~ 60V DC (Reverse power protection)
Power dissipation:	0.8W (single output) 1.2W (double outputs)
Input signal:	TC
Output signal:	4 ~ 20mA (sink/source)
Load resistance:	source: RL sink: RL U: Loop power supply
Compensation accuracy:	1°C (Temperature compensation range: °C ~ +60°C)
Temperature drift:	30ppm/°C
Response time:	
Electromagnetic compatibility:	IEC 61326-3-1
Dielectric strength:	non-intrinsically safe side) safe side)
Insulation resistance:	
Operation temperature:	-20°C ~ +60°C
Storage temperature:	-40°C ~ +80°C
Dimension:	17.8mm (W) × 110mm (H) × 117mm (D)
Output states:	Default following mode, it can be configured as 4mA~20mA NE43 mode or fixed output mode.

Wiring diagram

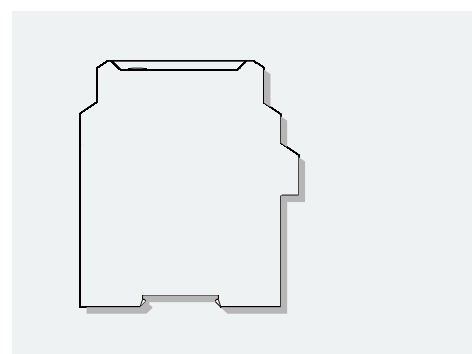

Explosive-proof parameters

China National Quality Supervision and Test Centre for Explosion Protected Electrical Products (CQST)

Ex marking:

Um: 250V

Certified parameters (Terminals 1, 2):

Uo=8.7V, Io=33mA, Po=72mW
Lo=21mH