


# TC & RTD Isolated Safety Barrier



NPEXA-H0D11

or

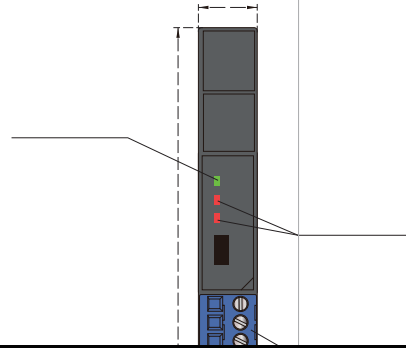

per m  
500  
compensation range: -20  
.01%F.S./  
1s  
2500 V AC (intrinsically safe side /  
500 V AC (Power supply side /  
100 M ( Input /Output/Power supply)

positive proof of parameters

Co=12 $\mu$ F  
Co=151 $\mu$ F  
Co=700 $\mu$ F

Model rules