

20 per line (RTD)

500


0.01%F.S./

1s

2500 V AC (intrinsically safe side /

500 V AC (Power supply side /

100 M (Input /Output/Power supply)

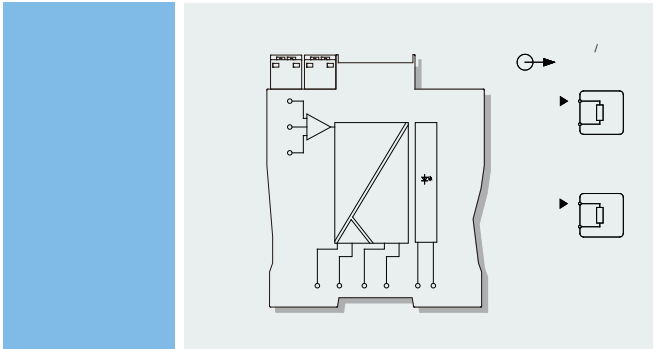

Co=12μF

Co=151μF

Co=700μF

