


C



→

()

→

: [Ex ia Ga] IIC [Ex ia Da] IIIC

: 12V DC ~ 30V DC

(1 2 4 5):

K E S B J T R N WRe3-WRe25

WRe5-WRe26

(7 8 10 11): 4 mA ~ 20 mA

: $R_t \leq [(U-12)/0.022] \Omega$ U

(25 °C ± 2 °C):

: 1 s

: 0.015 %F.S./°C

: ± 1 °C

: -20 °C ~ +60 °C


: EMC IEC 61326-3-1

(1mA 1 1 1 1 1 1 1)

	4mA~20mA
NPEXA-C1D11L	■

→

/

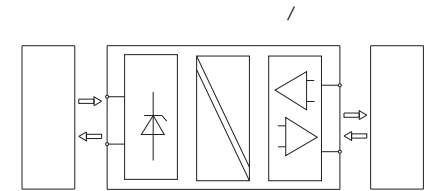

→

○

DIN IEC 60715 35mm

○

Nanjing New Power Electric Technology Co., Ltd.

: E-Mail: info@anpe.cn @ 678 p 6264

VPO

A

LC

DIN

÷

B

○