

→ 简介

CAN

→ 技术参数

供电电源(14+ 15-):

18V DC ~ 60V DC (24V DC)

输入(1 2 3):

CAN (ISO 11898)
CAN

输出(7 8 9):

CAN (ISO 11898)
CAN

传输特性:

≤ 2 μs
≤ 300 kbps

驱动能力: ≤ 10

配电(5 6):

±10%

电磁兼容: EMC IEC 61326-3-1

介电强度(漏电流1mA 测试时间1分钟):

≥ 1500V AC (/ /)

绝缘电阻: ≥ 100 MΩ (/ /)

环境条件:

-20 °C ~ +60 °C
10 %RH ~ 90 %RH (40 °C)
80 kPa ~ 106 kPa
-40 °C ~ +80 °C


功耗:

8V/9V/12V 50mA ≤ 2 W ()
5V/6V 100mA ≤ 3.5 W ()
24V 100mA ≤ 4 W
9V 140mA ≤ 4.5 W

→ 型号命名规则


1

→ 接线图

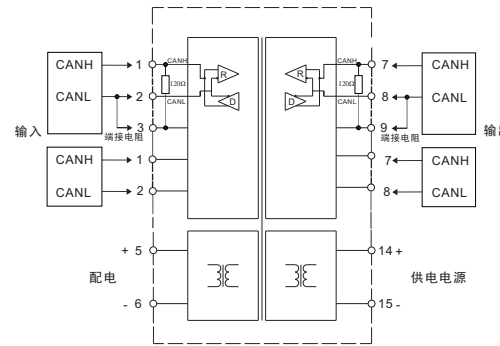


→ 外形结构

× × : 17.8mm×110mm×117mm



→ 旋码开关设置



旋码开关	配电
S0	5V DC 100mA
S1	6V DC 100mA
S2	8V DC 50mA
S4	9V DC 50mA
S8	12V DC 50mA

→ 安装

○ DIN IEC 60715 35mm

A
DIN

B

C CAN



Nanjing New Power Electric Technology Co., Ltd.

c
o

o